





EVERUN ER408 WHEEL LOADER 4WD



Standard Configuration

Standard Bucket, Changchai 390 Engine, Torque Converter Transmission System, Rops & Fops Cabin, Mechanical Joystick, Floating Function, Tipping Cabin, Adjustable Steering Wheel, Comfortable Seat, Cabin Heater, Backward Camera, Hydraulic-Pressure Checking System, Engine Heater, 31*15.5-15 Agricultural Tyres, Lock for Lifting and Steering Cylinder, Parallel Linkage System, Free Service Spare Parts.

Optional Configuration

Quick Hitch, Electric Joystick, Air Conditioner, Extra Hydraulic Line, LED Light, E4 Lamp, Varta Anti-Freeze Battery 20.5/70-16 Tyres, 31*15.5-15 Turf Tyres, Tyre Chain, Three-Point Hitch, Loading Damper, Centralized Lubrication System, Loader Weighter, 5 Functions Electric Joystick, Kohler 1903TCR Engine(EPA4), Different Attachments.

Technical Parameter

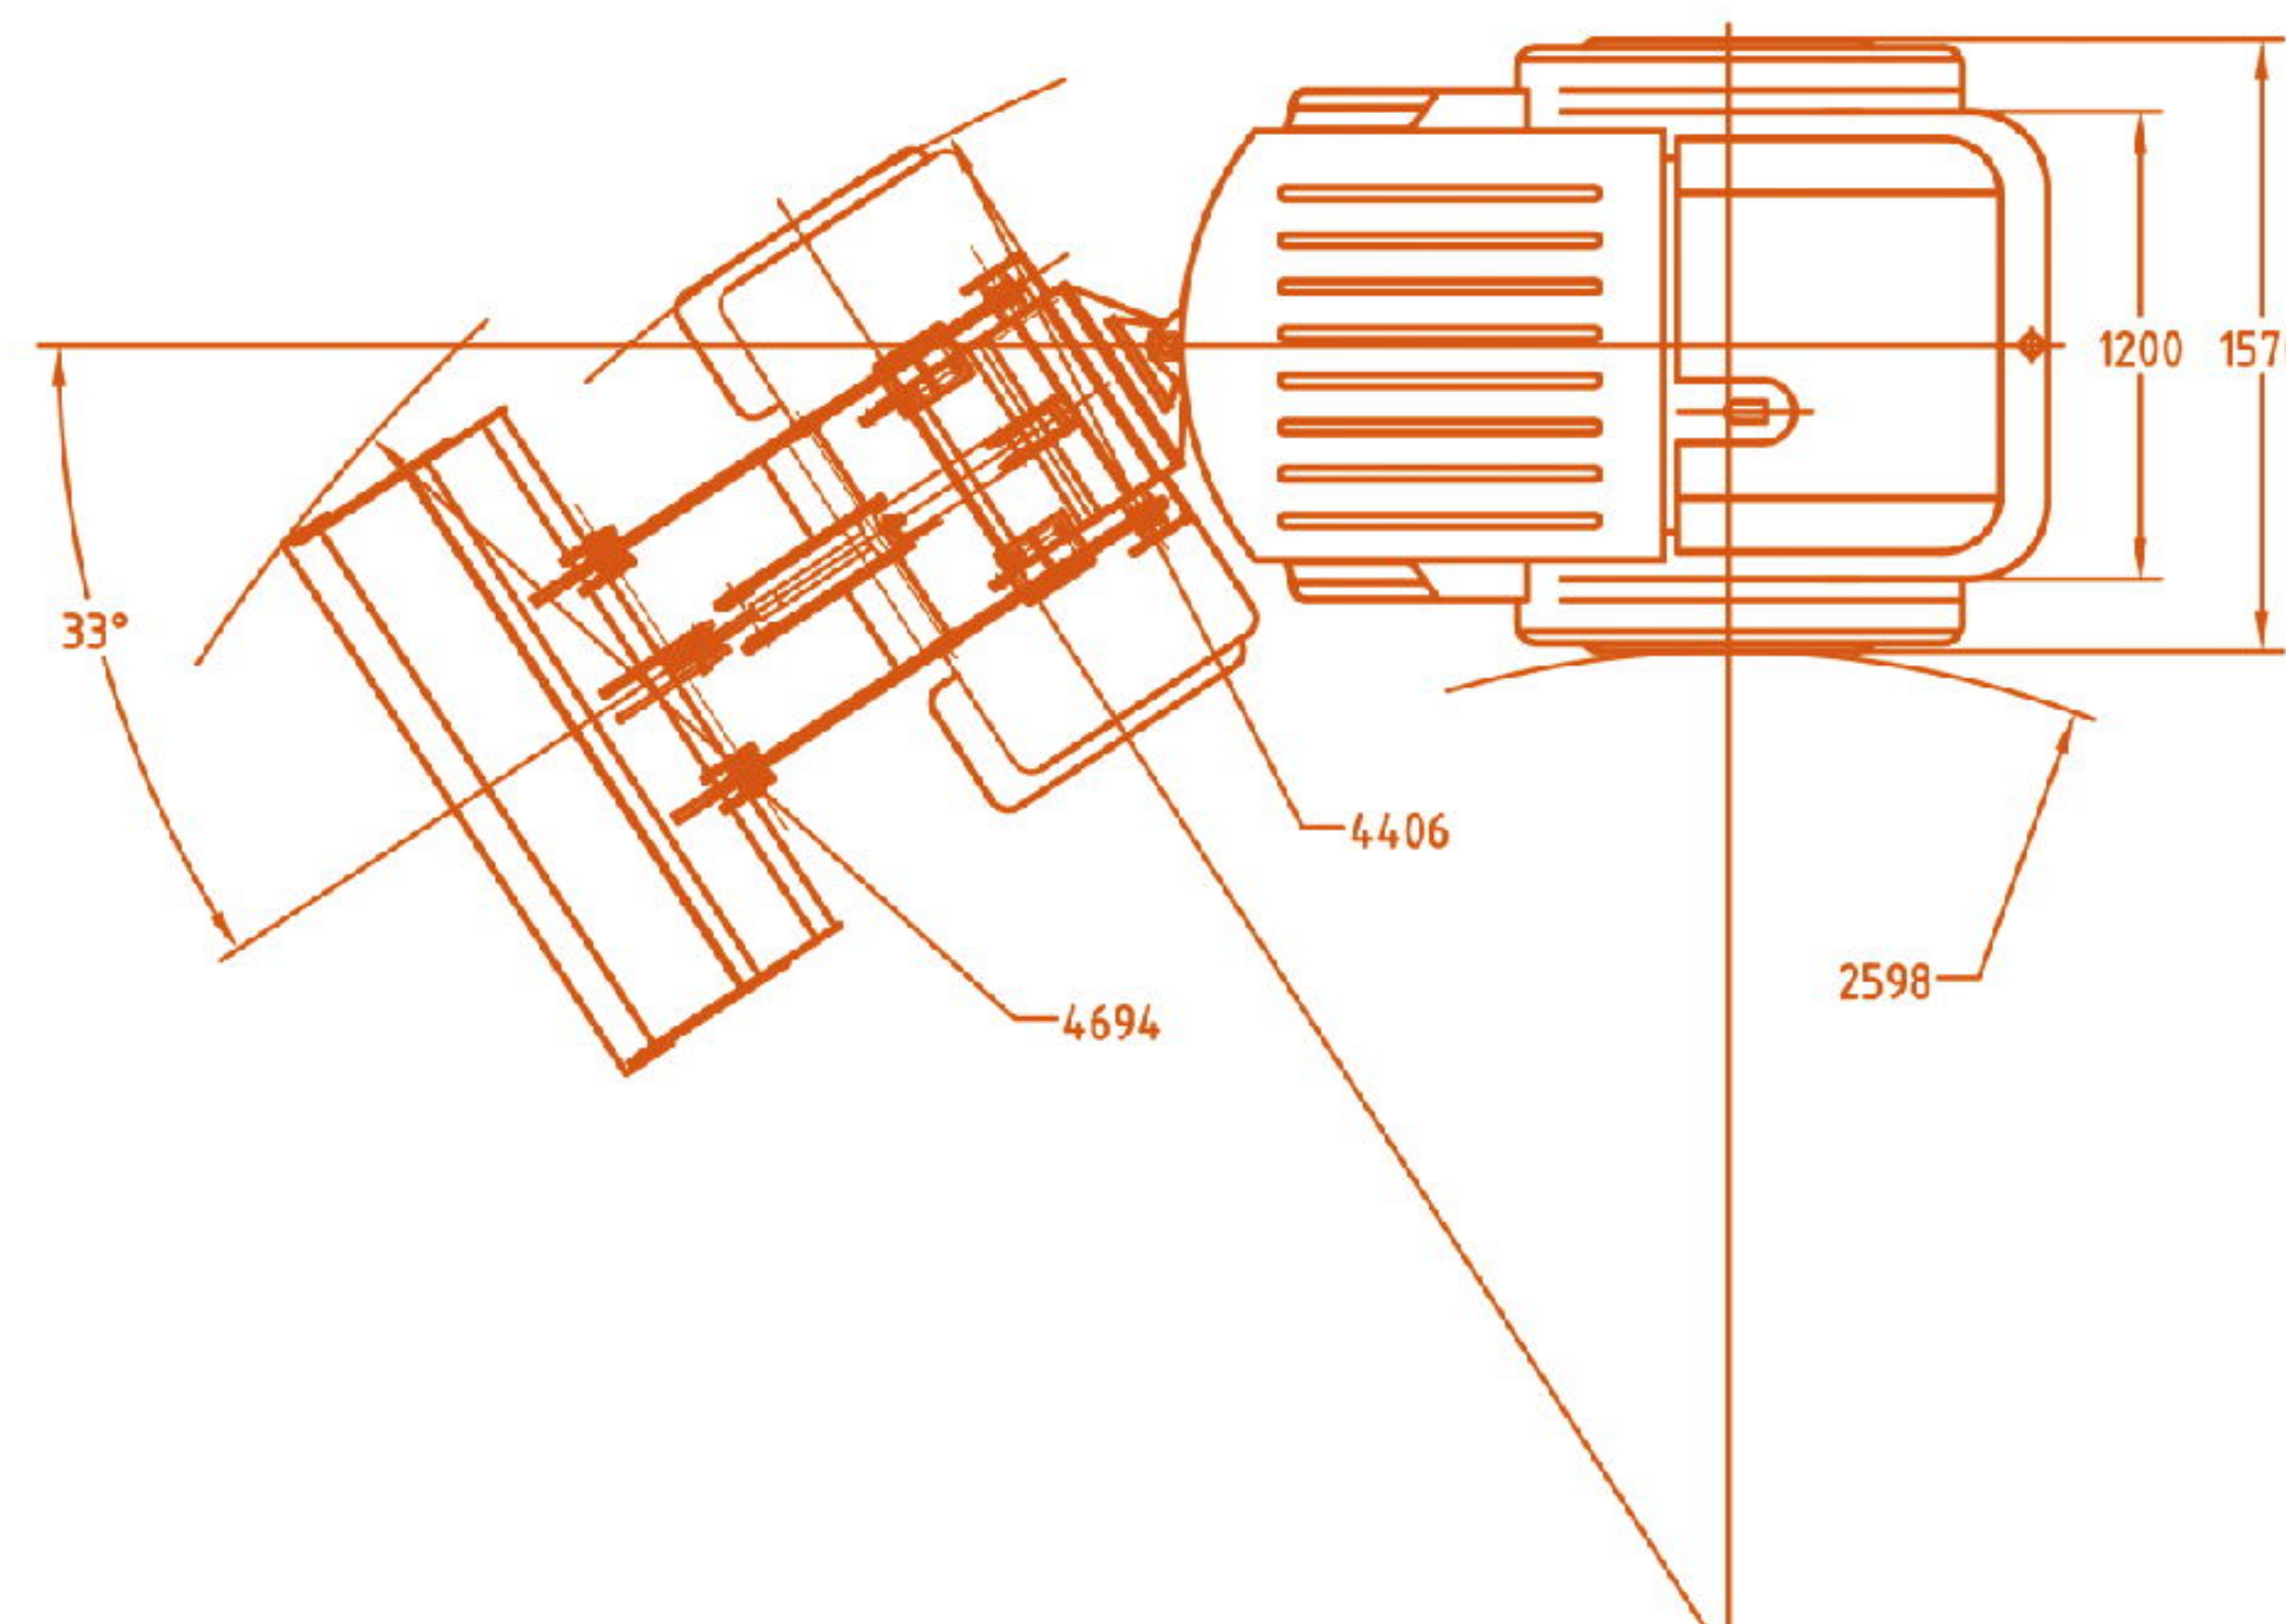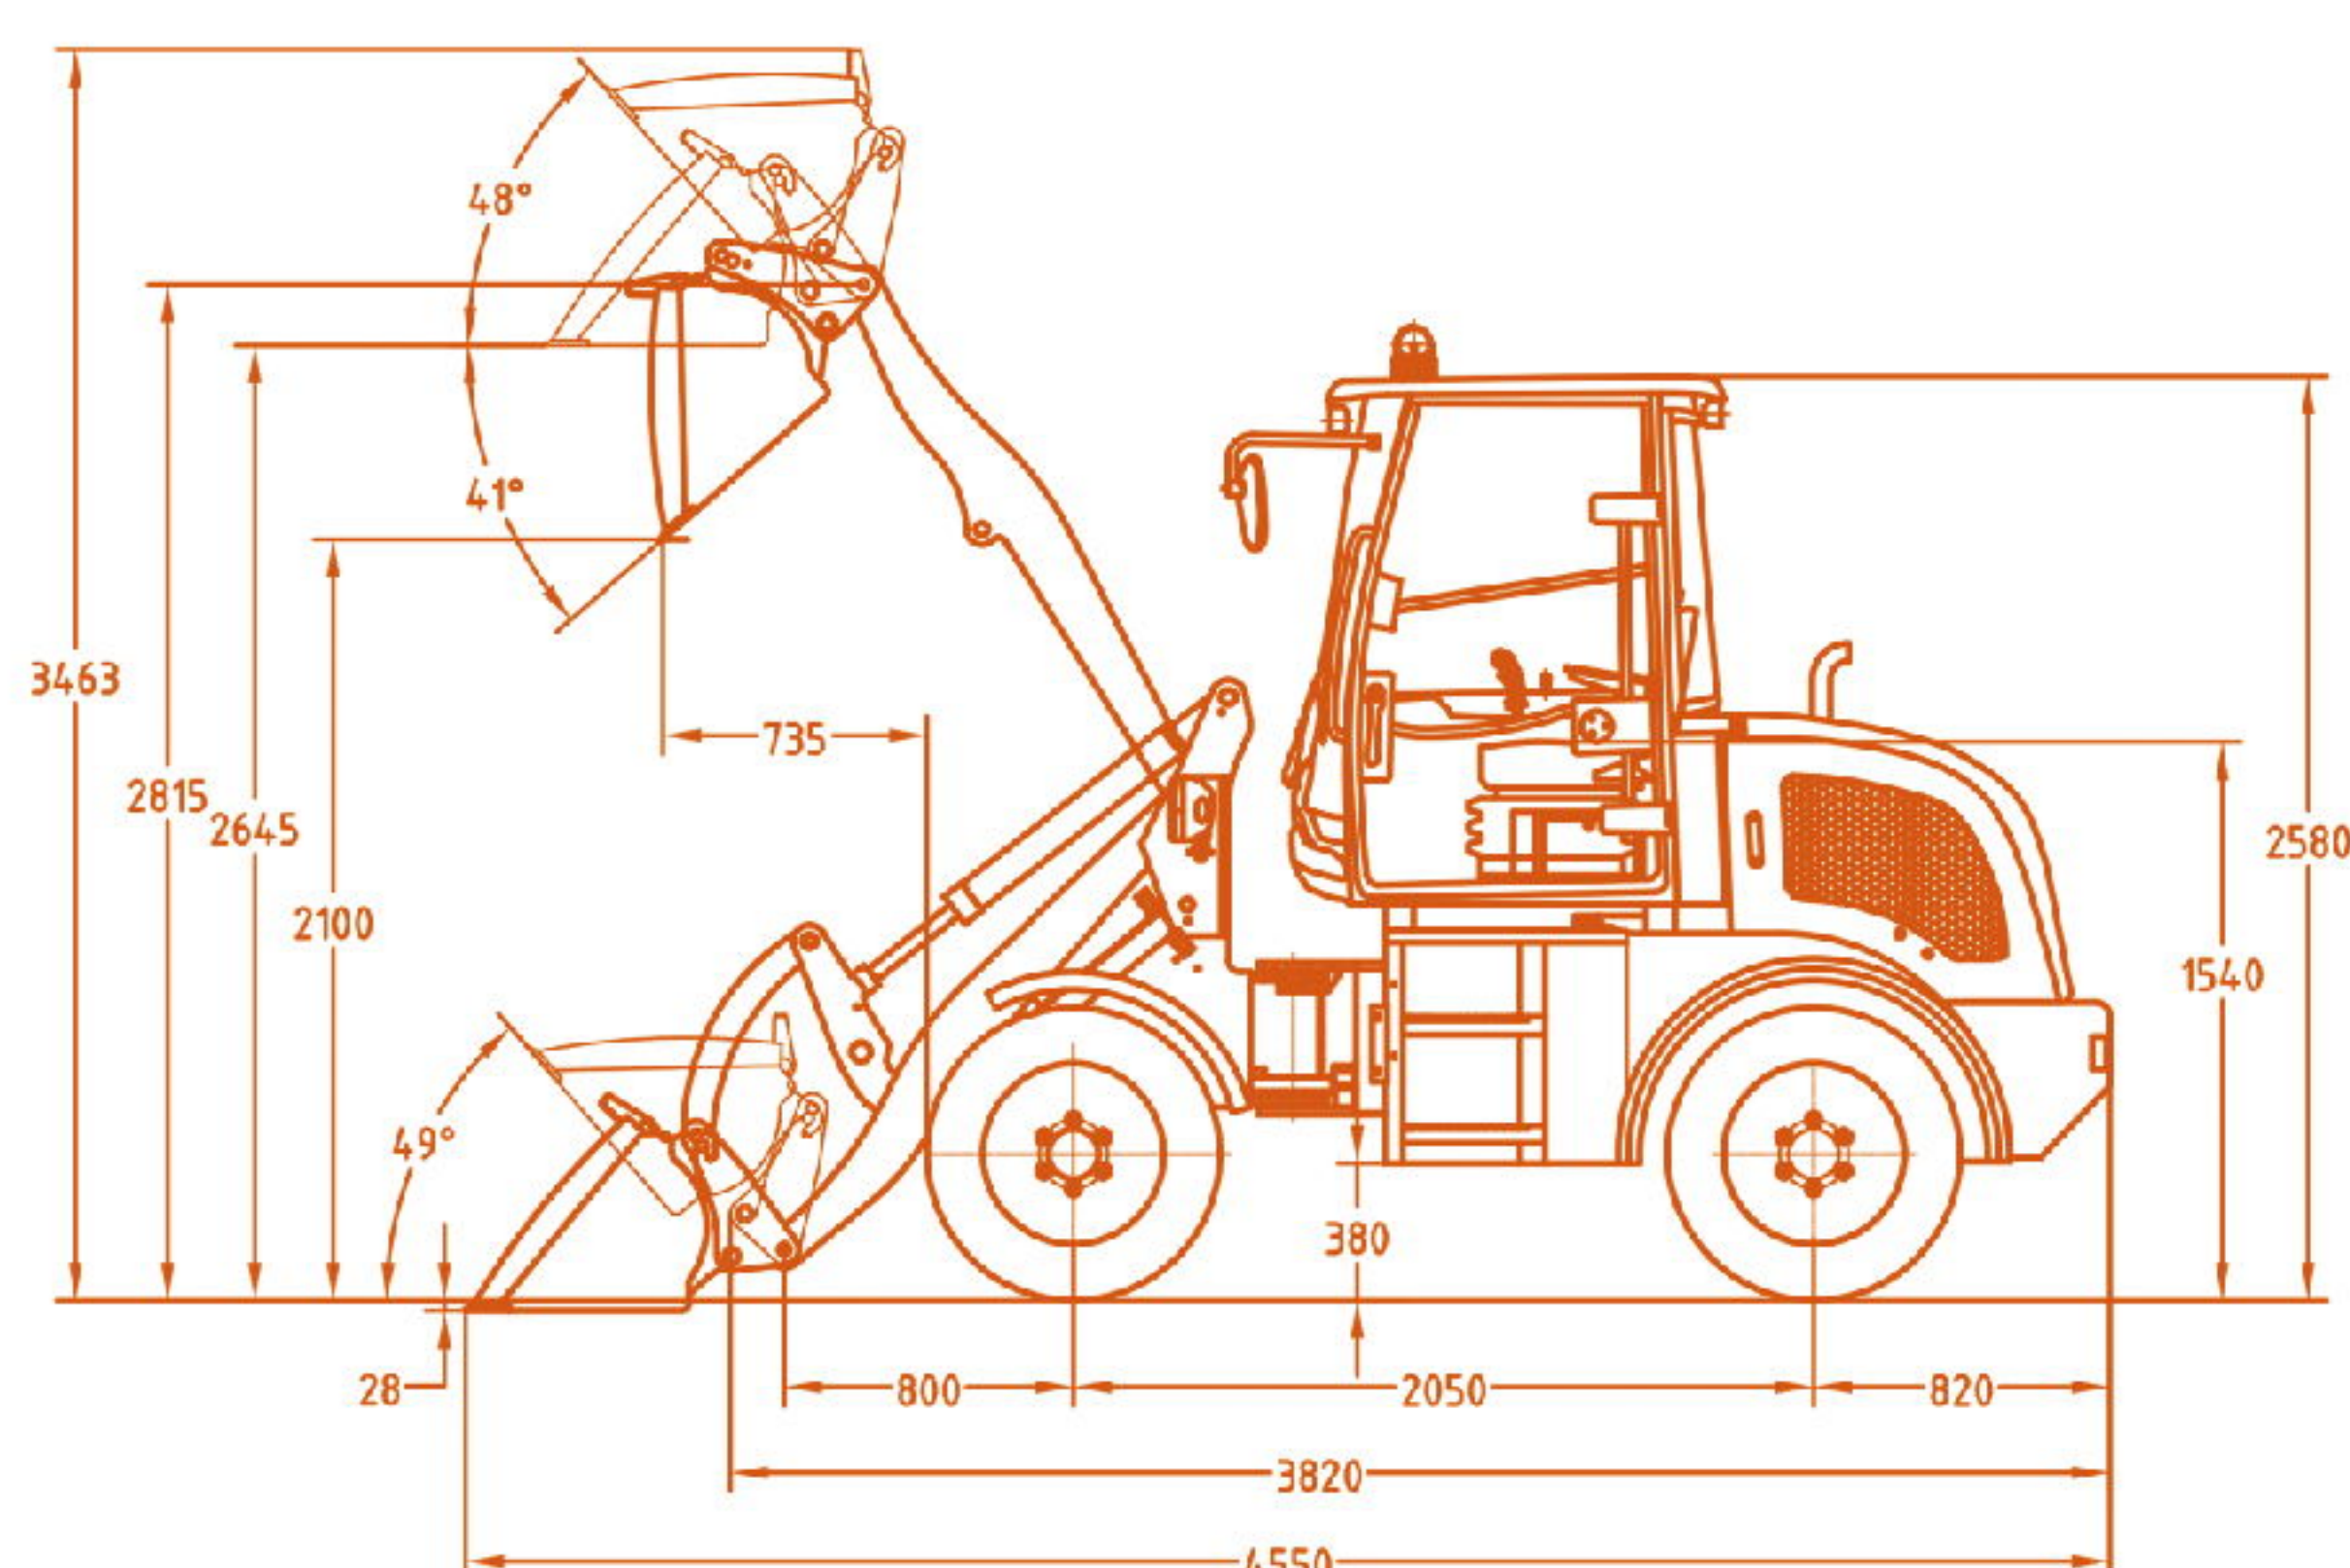

Bucket Capacity	0.48m ³
Loading Capacity	800kg
Max. Driving Speed(I/II)	7.8/23km/h
Fuel Consumption Ration	276g/km·h
Engine Model	Changchai 390 Engine
Engine Power	25kw
Service Brake	Four Wheel Hydraulic Spread-Shoed Brake

Net Weight	2700kg
Lifting Time	5s
Working Pressure	17mpa
Wheel Base	2050mm
Breakout Force	22kn
Tyre	31*15.5-15
Oil Flow	50L/min
Rated Speed	2400r/min

Qingdao Everun Machinery Co.,Ltd

Address : Room 902, Yongxin International Finance Centre
No.6 Qinling Road, Qingdao, China

Tel : +86-532-80997859

Website: www.everun.cc

▶▶▶▶ (New) : www.everun.com

Email : info@everun.cc

Fax: +86-532-80993178

